



# FD3-P / FDP3-P

Price Computing Scale

# FD3-P / FDP3-P

## Price Computing Scale

### Features:

- FD3-P: Vendor side display at front and customer side display
- FDP3-P: Vendor side display at front and one display on tower or double displays on tower
- High speed 24bits AD
- Faster display reading speed
- Faster weighing stability and zero return
- Zero key and Tare key react faster
- Vendor and customer sides LCD displays with LED backlight
- LCD display full tare (Weight-6 digits, Unit Price-6 digits, Total Price-6 digits)
- Low power and charging status indication
- Built-in rechargeable battery
- Water channel designed underneath the platter to give a better protection against water running into the scale
- Unique rubber ring design to prevent dust, dirt, cockroaches and water intrusion into the scale for better reliability and hygiene
- Special power switch design to prevent moisture getting inside the scale for better performance stability and reliability
  
- Special sunken power coil outlet design to prevent water running into the socket to improve safety and reliability
- Easily adjusted leveling feet for stability and the scale

### Non-approval Model:

- 1/3,000 up to 1/6,000 display resolution, single range or multi-range
- Money change
- Kilogram (Kg) or pound (lb) weighing modes
- Up to 99 data accumulation and 25 data recall

### Approval Model:

- 1/3,000 display resolution, single range or multi-range

### Options:

- RS232 or serial printer output

### Specifications:

Model	Capacity	Division (single range)	Division (multi-range)
FD3-P / FDP3-P -3	3 kg (6 lb)	1g (0.002 lb)	N/A
FD3-P/FDP3-P-6	6 kg (12 lb)	2g (0.005 lb)	1g / 2g
FD3-P / FDP3-P -15	15 kg (30 lb)	5g (0.01 lb)	2g / 5g
FD3-P / FDP3-P -30	30 kg (60 lb)	10g (0.02 lb)	5g / 10g


**Operating Temperature:** 0°C ~ 40°C (32°F ~ 104°F); **Approval Model:** -10°C ~ 40°C (14°F ~ 104°F)

**Power Supply:** AC 110/230V ±10% or DC 6V/4AH Rechargeable Battery

**Dimensions:** FD3-P: 300 x 100 x 330 mm (W x H x D); FDP3-P: 300 x 530 x 330 mm (W x H x D)

**Platter Size:** 300 x 225 mm (W x D)

**Display:** LCD 6, 6, 6 digits, height 18mm; Pole display: height 14mm

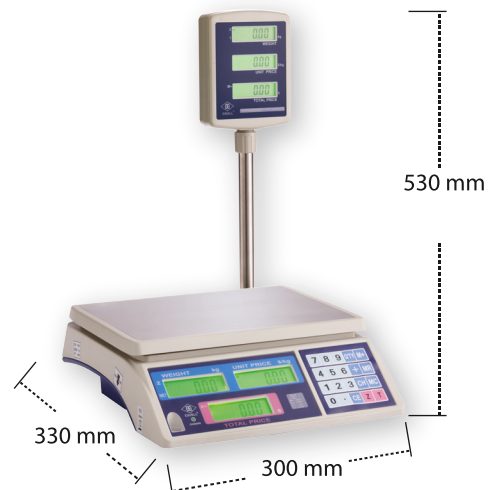

## EXCELL PRECISION CO., LTD.

6F, No.127, Lane 235, Pao-Chiao Road, Hsin Tien, Taipei Hsien, 231, Taiwan  
 Tel: +886-2-89191000 Website: [www.excell-scale.com](http://www.excell-scale.com)  
 Fax: +886-2-89191177 E-mail: [sales@excell-scale.com](mailto:sales@excell-scale.com)